

721 Series

Cabinet lock bodies for small format IC



NOW STOCKING

ANSI/BHMA Grade 1 | E07121 / E07041 compatible | Retrofits Best 3L
Accepts Best, Arrow, Falcon or equivalent small format interchangeable core cylinders

- » Accepts Best-style small format interchangeable core cylinders
- » Available for cabinet doors or drawers
- » Deadbolt lock for more security
- » Four finishes available
- » Field reversible between door or drawer function
- » Optional key-retaining available
- » ANSI/BHMA Grade 1

SPECIFICATIONS

Retrofits: Best 3L
Reversible: Easily reversible via set-screw
Testing: Passed ANSI/BHMA A156.11, Grade 1 testing requirements.
Woodwork Institute: Acknowledged product
US Patent Nos: 4,899,563; 4,920,774
Body: Zinc die cast
Bolt: Brass, 3/4" projection
Barrel length: 1-1/4" or 1-3/8"
Barrel diameter: 1-1/8"
Key-retaining function: Optional
Finish: US26D (satin chrome), US26 (polished chrome), US3 (bright brass) or US10B (oil rubbed bronze)


CYLINDER INFORMATION

Cylinder: Not included.
Accepts: Best, Arrow, Falcon, KSP, Schlage or equivalent small format interchangeable core cylinders.
Accepts: Sargent XC or Marks high security cylinders (specify SP1 option)
Compatible electronic cylinders: Medeco Nexgen XT or VIDEX Cyberlock SFIC cylinders.

OPTIONAL ACCESSORIES

Spacers: 10-350 (1/8" thick), 10-348 (1/4" thick), 10-349 (1/2" thick)
Strikes: 10-052, 10-055, 10-056, 10-058, 12-2, 12-4
Trim ring: TR78
Through-bolt hardware: ETS1 trim plate, ETS1-PL trim pull and ETST1 template
SFIC cores: 206/207 Series


721DR | Door

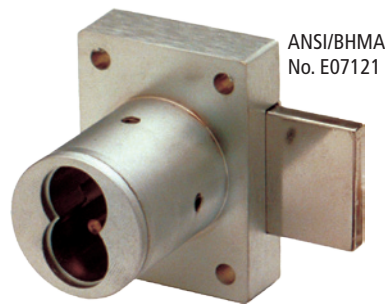

CABINET DOOR LOCK

Door function: Bolt locks horizontally (left/right)
ANSI/BHMA No: Equivalent to E07121
Barrel length: 1-1/4" or 1-3/8"
Standard: Non-handed, key removable in locked or unlocked position.
Key-retaining (optional): Key removable in locked position only. Specify handing (KL = left-hand or KR = right-hand) at time of order.

721DW | Drawer

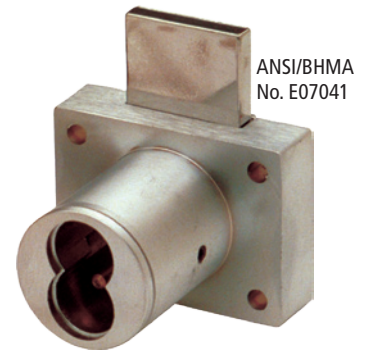

CABINET DRAWER LOCK

Drawer function: Bolt locks vertically (up/down)
ANSI/BHMA No: Equivalent to E07041
Barrel length: 1-1/4" or 1-3/8"
Standard: Non-handed, key removable in locked or unlocked position.
Key-retaining (optional): Key removable in locked position only. Specify handing (KV = vertical-hand or KI = inverted-hand) at time of order.

Item	Function	Finish	Cyl. Length	Description
721DR 721DW	Door Drawer	26D, US26, US3, 10B	1-1/4"	Lock body for small format IC Standard function
721DR-138 721DW-138	Door Drawer	26D	1-3/8"	
721DR-SP1 721DW-SP1	Door Drawer	26D, US26, US3, 10B	1-1/4"	Lock body for Sargent XC or Marks high security cores
721DR-KR 721DW-KR	Door-KR Drawer-KR	26D, US26, US3, 10B	1-1/4"	Lock body for small format IC Key-retaining function
721DR-KR138 721DW-KR138	Door-KR Drawer-KR	26D	1-3/8"	
Key-retaining function:		Cycle to "locked" position before inserting core.		

